



Designed for long life and total reliability, Friedland's range of solenoid-operated security bells are compatible with all leading alarm control panels and are suitable for use in fire alarm and intruder systems, as well as in general industrial and commercial signalling applications. The extensive range is available in red or grey in a wide choice of sizes and voltages - and there is now an added selection of security horns to further expand the range.

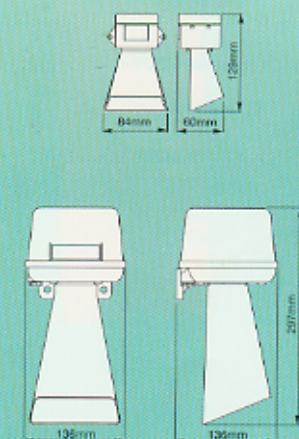

IP 44

56-/59-/66-/69
AC Masterbell and Bigbell/
DC Masterbell and Bigbell

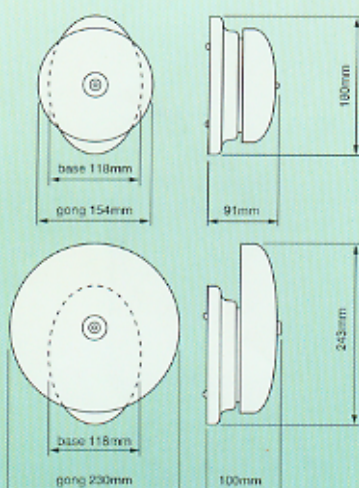

<u>ΒΙΟΜΗΧΑΝΙΚΑ ΚΟΥΔΟΥΝΙΑ</u>			
<u>ΠΡΟΪΟΝ</u>	<u>VOLTAGE</u>		<u>DE CIBELL</u>
<u>ΕΝΑΛΛΑΞΕΣ ΟΜΕΝΟΥ ΠΕΥΜΑΤΟΣ AC (MINI)</u>			
56-012	12V	AC	100 dB
56-024	24V	AC	100 dB
56-120	120V	AC	100 Db
56-230	230V	AC	100 dB
<u>ΣΥΝΕΧΟΥΣ ΠΕΥΜΑΤΟΣ DC (MINI)</u>			
66-06 SP	6V	DC	91 dB
66-12 SP	12V	DC	91 dB
66-24 SP	24V	DC	91 dB
<u>ΕΝΑΛΛΑΞΕΣ ΟΜΕΝΟΥ ΠΕΥΜΑΤΟΣ AC</u>			
<u>ΜΕΓΑΛΟ (LONG)</u>			
59-230	230V	AC	106 dB
56-66	ΚΟΥΤΙ		106 Db
<u>ΚΟΥΔΟΥΝΙΟΥ</u>			
ΜΕ ΧΡΗΣΗ ΚΟΥΤΙΟΥ 55-56 ΠΡΟΣΤΑΣΙΑ IP44			



ΚΟΡΝΕΣ		
ΠΡΟΪΟΝ	VOLTAGE	DE CIBELL
ΕΝΑΛΛΑΞΕΣ ΟΜΕΝΟΥ ΠΕΥΜΑΤΟΣ AC (MINI)		
E2622/1	6-8V AC	92 Db
E2622/2	12V AC	92 dB
E2622/3	24V AC	92 dB
E2622/5	220V AC	92 dB
ΣΥΝΕΧΟΥΣ ΠΕΥΜΑΤΟΣ DC (MINI)		
E2621/6	12V DC	92 dB
E2621/7	24V DC	92 dB
ΕΝΑΛΛΑΞΕΣ ΟΜΕΝΟΥ ΠΕΥΜΑΤΟΣ AC ΜΕΓΑΛΗ (LONG)		
E2620/2	12V AC	108 dB
E2620/3	24V AC	108 dB
E2620/5	220V AC	108 dB
ΣΥΝΕΧΟΥΣ ΠΕΥΜΑΤΟΣ DC ΜΕΓΑΛΗ (LONG)		
E2620/6	12V DC	108 dB
E2620/7	24V DC	108 dB